

ACCESSORIES CHECK & STOP VALVES



Specification

Fluid	Dry or Lubricated Air
Operating Pressure	-750mm Hg (10 Torr) to 10bar (150psi)
Temperature	0°C to +60°C
Cracking Pressure	0.3bar to 0.5bar (5psi to 7.5psi)

Design


Check Valves

Brass Nickel Plated
Open – Thread to Tube
Closed – Tube to Thread

Stop Valves, Self Sealing

Brass Nickel Plated
Open – Tube to Thread
Closed – Thread to Tube

Structure

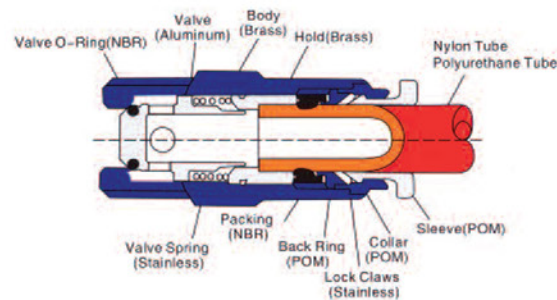

Symbol

Check Valve



Stop Valve, Self Sealing



Ordering Codes

Check Valves

PCVC	04	M5
Model	OD	Thread
Check Valve Tube x BSPT	04 : 4mm	M5 : M5
	06 : 6mm	M6 : M6
	08 : 8mm	01 : 1/8"
	10 : 10mm	02 : 1/4"
	12 : 12mm	03 : 3/8"

PCVF	01	01
Model	Thread	Thread
Male x Female, BSPP	01 : 1/8"	01 : 1/8"
	02 : 1/4"	02 : 1/4"
	03 : 3/8"	03 : 3/8"
	04 : 1/2"	04 : 1/2"

PCFF	01	01
Model	Thread	Thread
Female x Female, BSPT	01 : 1/8"	01 : 1/8"
	02 : 1/4"	02 : 1/4"
	03 : 3/8"	03 : 3/8"
	04 : 1/2"	04 : 1/2"

PCVU	04
Model	OD
Tube x Tube	04 : 4mm
	06 : 6mm
	08 : 8mm
	10 : 10mm
	12 : 12mm

Stop Valves, Self Sealing

SPC	01	01
Model	OD	Thread
Stop Valve Tube x BSPT	06 : 6mm	02 : 1/4"
	08 : 8mm	03 : 3/8"
	10 : 10mm	04 : 1/2"
	12 : 12mm	

SPU	06
Model	OD
Stop Valve Tube x Tube	06 : 6mm
	08 : 8mm
	10 : 10mm
	12 : 12mm