


## Series Timer Control Drain Valve

Timer Control Drain Valve



Overall Dimension

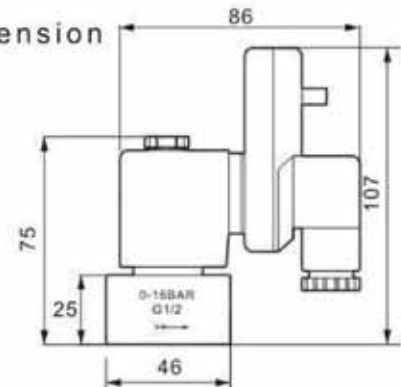

### Speciality

- Conforming to CE standard.
- Full automatic without the need of maintenance.
- Suitable for automatic discharge of condense water in many occasions and automatic irrigation system.
- Different voltage are available for selection.
- Interval time and working time adjustable , with manual testing switch.
- Use electronic switch, high reliability and durable.
- ABS flame-proof house, can reach IP65 class after installed;
- NBR and FPM for wide range application.
- Direct-acting ,big orifice, to avoid blockade.
- Filter ball valve can be installed before drainer to avoid block.

Model	TEC22
Valve Style	Two-position Two-way Direct acting Solenoid Valve
Connection Port	1/4", 3/8", 1/2" (Female)
Working Pressure	16Bar, 25Bar, 40Bar, 80Bar
On Time	0.5-10sec
Off Time	0.5-45min
Ambient Temperature	-20°C-60°C
Highest Medium Temperature	90°C
Valve Body	Brass, stainless steel
Orifice	1.9-4.5mm
Insulation, Protect Class	F Class, IP65 (with plug)
Voltage	24-240V DC/AC 50/60Hz±10%
Mounting	Any Place