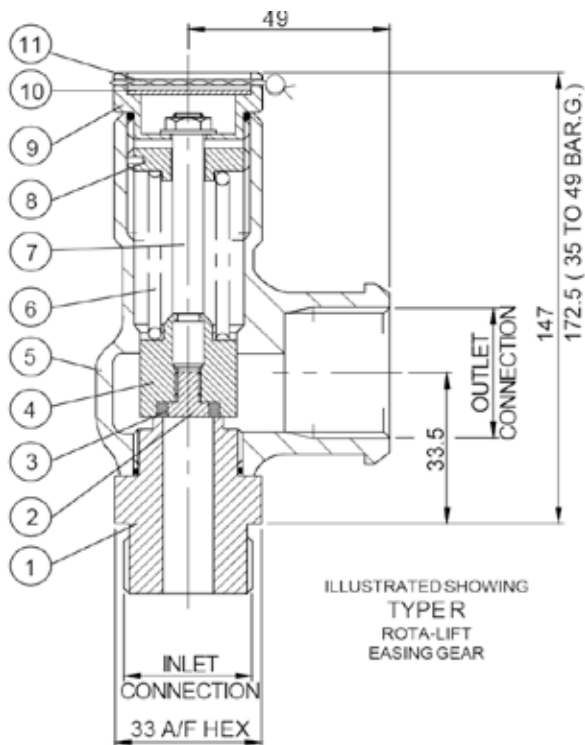


**Pressure Range**

From: 0.32 bar g. (4.64 psi g.)
To: 49.00 bar g. (710.50 psi g.)

**Temperature Range**

-20 °C to 200 °C (subject to seal material)

**Flow Area**

147.41 mm² (13.70 mm inlet bore diameter)

**Connections**

Inlet: 3/4" BSP, BSPT, NPT
Outlet: 1" BSP

**Seal Materials**

Nitrile
Viton®
Neoprene
Ethylene Propylene

ASME	GP 63713	GP 64713	GP 65713
PED / TÜV / ASME	GP 63113	GP 64113	GP 65113
PED / TÜV	GP 63613	GP 64613	GP 65613
1 INLET SEAT	BRASS CW614N	ST. STEEL 1.4401 (316)	ST. STEEL 1.4401 (316)
2 SEAL	TO SUIT	TO SUIT	TO SUIT
3 SEAL RETAINER	BRASS CW614N	ST. STEEL 1.4401 (316)	ST. STEEL 1.4401 (316)
4 PLUNGER	BRASS CW602N	ST. STEEL 1.4401 (316)	BRASS CW602N
5 BODY	BRONZE CC491K (SB-62 C83600)	ST. STEEL 1.4408 (316)	BRONZE CC491K (SB-62 C83600)
6 SPRING	ST. STEEL 1.4310 (302)	ST. STEEL 1.4310 (302)	ST. STEEL 1.4310 (302)
7 SPINDLE	ST. STEEL 1.4057 (431)	ST. STEEL 1.4057 (431)	ST. STEEL 1.4057 (431)
8 ADJUSTER	BRASS CW614N	ST. STEEL 1.4401 (316)	BRASS CW614N
9 CAP	BRASS CW614N	ST. STEEL 1.4401 (316)	BRASS CW614N
10 NAMEPLATE	ALUMINIUM ALLOY	ALUMINIUM ALLOY	ALUMINIUM ALLOY
11 WIRE & SEAL	ST. STEEL & LEAD	ST. STEEL & LEAD	ST. STEEL & LEAD


Notes

- Maximum permissible built up back pressure is 10% of set pressure
- Stable operation on flows down to 50% of valve rated capacity
- Relieving pressure is set pressure +10% (0.3 bar g. below 1.40 bar g.)
- Reseating pressure is set pressure -10% (0.3 bar g. minimum)
- Below 1.40 bar g., PED certified only

Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- ASME Section VIII Division 1
- PED 97/23/EC

Discharge Capacity's

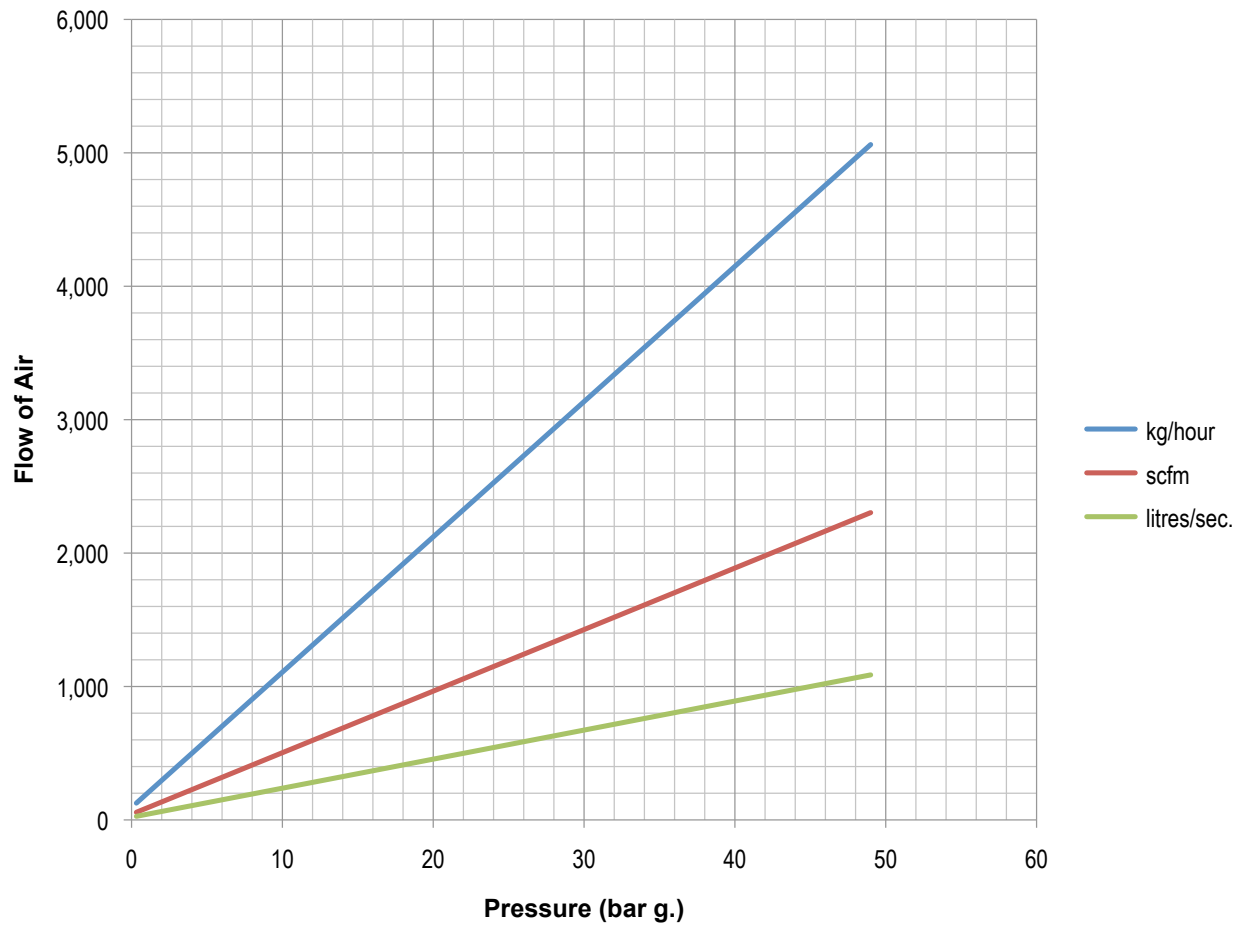

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Top Fittings

