


98 Union elbow, taper seat, ISO/EN UA12

Torque and notes for installation please find in "Technical Product Notes".
374 G ... refers to the thread size G according to ISO 228 of the union nut 374.


EN		Dim. [inch]	374 G [inch]	Code	b [mm]	c [mm]	z1 [mm]	s1 [mm]	s2 [mm]
•	B	¼	⅝	770 098 102	61	21	11	15	28
•	G	¼	⅝	770 098 202	61	21	11	15	28
•	B	⅜	¾	770 098 103	65	25	15	20	32
•	G	⅜	¾	770 098 203	65	25	15	20	32
•	B	½	1	770 098 104	76	28	15	25	41
•	G	½	1	770 098 204	76	28	15	25	41
•	B	¾	1 ¼	770 098 105	82	33	18	32	48
•	G	¾	1 ¼	770 098 205	82	33	18	32	48
•	B	1	1 ½	770 098 106	94	38	21	38	55
•	G	1	1 ½	770 098 206	94	38	21	38	55
•	B	1 ¼	2	770 098 107	107	45	26	48	67
•	G	1 ¼	2	770 098 207	107	45	26	48	67
•	B	1 ½	2 ¼	770 098 108	115	50	31	54	74
•	G	1 ½	2 ¼	770 098 208	115	50	31	54	74
•	B	2	2 ¾	770 098 109	128	58	34	67	90
•	G	2	2 ¾	770 098 209	128	58	34	67	90
-	B	2 ½	3 ½	770 098 110	164	72	45	85	111
-	G	2 ½	3 ½	770 098 210	164	72	45	85	111
-	B	3	4	770 098 111	167	79	49	95	131
-	G	3	4	770 098 211	167	79	49	95	131

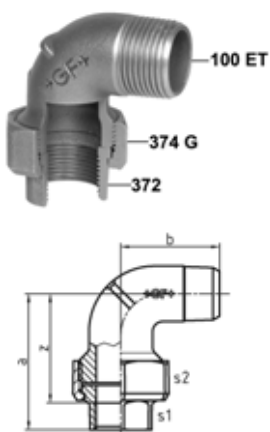

100 Union elbow, flat seat

Supplied without sealing gaskets; a and z include the seal thickness as per table "Sealing Gasket Dimension".
374 G ... refers to the thread size G according to ISO 228 of the union nut 374.

EN		Dim. [inch]	374 G [inch]	Code	a [mm]	b [mm]	z [mm]	s1 [mm]	s2 [mm]
-	B	½	1	770 100 104	58	39	45	26	41
-	G	½	1	770 100 204	58	39	45	26	41
-	B	¾	1 ¼	770 100 105	61	43	46	31	48
-	G	¾	1 ¼	770 100 205	61	43	46	31	48
-	B	1	1 ½	770 100 106	71	52	55	38	55
-	G	1	1 ½	770 100 206	71	52	55	38	55

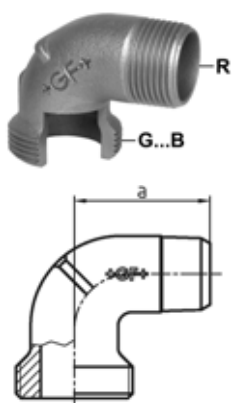

100 ET Union bush to fig. 100

EN		Dim. R [inch]	G...B [inch]	Code	a [mm]
-	B	½	1	770 600 104	39
-	G	½	1	770 600 204	39
-	B	¾	1 ¼	770 600 105	43
-	G	¾	1 ¼	770 600 205	43
-	B	1	1 ½	770 600 106	52
-	G	1	1 ½	770 600 206	52